

PREPARED BY : (制作人 :) CJJ	 EASYQUICK TECHNOLOGY SPECIFICATION 深圳市易快来科技股份有限公司	SPEC No: (规格型号:) EQT500HYZ018L
R&D APPROVED BY: (研发核准:)		FILE No : (档案编号 :) EQ2021121801
QC APPROVED BY: (品质核准)		ISSUE (日期) 2021-12-18
		PAGE (页码) 8 APPLICABLE DIVISION (适用范围) ☒ LCD DIVISION ☒ 液晶模组

For **HD** TFT LCD Module

EQT500HYZ018L SPEC&IIS

Customer side signature (客户方签名)			
部门 签名	Acknowled-ge (承认人)	Date (日期)	Remarks (备注)
Structure (结构)			
Electronics (电子)			
Item (项目)			
Quality (品质)			

EASYQUICK TECHNOLOGY

(易快来科技)

PEC No.	MODEL No.	Revised	PAGE
EQT2021121801	EQT500HYZ018L	Ver01	1

EASYQUICK TECHNOLOGY

1. Application（应用）

This data sheet is to introduce the specification of **EQT500HYZ018L** active matrix **16.7M** color TFT LCD module.

Main color LCD module is controlled by Driver IC **ST72568**

If any problem occurs concerning the items not stated in this specification, it must be solved sincerely by both parties after deliberation.

As to basic specification of driver IC refer to the IC specification and handbook.

本规格书是为了介绍 **EQT500HYZ018L** 有源矩阵 **16.7M** 彩色 TFT LCD 模块的规格。

主彩色液晶显示模块由驱动芯片 **ST72568** 控制

本规范未尽事宜如有问题，双方必须认真协商解决。

驱动 IC 的基本规格参照《IC 规格书》和相关《手册》。

2. Construction and Outline（结构与大纲）

Construction: LCD panel, Driver (COG), FPC with electric components, **20** White LED lump, prism sheet, diffuser, light guide and reflector, plastic frame to fix them mechanically.

There shall be no scratches, stains, chips, distortions and other external drawbacks that may affect the display function.

In order to realize thin module structure, double-sided adhesive tapes are used to fix LCD panels. As these tapes do not guarantee to permanently fix the panels, LCD panel may rise from the module when shipped from factory.

So please make sure to design the system to hold the edges of LCD panel by the soft material such as sponge when LCD module is assembled into the cabinet.

结构:液晶面板，驱动或 COG，带电子元件的 FPC, **20** 个白光 LED 块，棱镜片，扩散器，导光器和反射器，塑料框架机械固定。

不应有可能影响显示功能的划痕、污迹、芯片、畸变等外部缺陷。

为了实现薄型模块结构，采用双面胶带固定液晶面板。由于这些胶带不能保证永久有效固定面板，LCD 面板在出厂时可能会从模块内移动。

所以在液晶模块组包装和进柜时，请务必将包装结构设计成用海绵等软材料支撑液晶面板的边缘。

PEC No.	MODEL No.	Revised	PAGE
EQ2021121801	EQT500HYZ018L	Ver01	2

EASYQUICK TECHNOLOGY

3. Mechanical Specification (参数规格)

Table 1 (表 1)

Item(项目)	Specifications(规格)	Unit (单位)
Screen size (屏幕尺寸)	5.0	inch
Display mode (显示模式)	RGB	-
Active area (显示范围)	108(H) X 64.8(V)	mm
CTP area (显示范围)	109(H)×65.8(V)	mm
Display format (分辨率)	800 RGB (H) x 480 (V)	-
Pixel confinguration (像素)	0.135 (H) x 0.135 (V)	-
Outline Dimensions (外形尺寸)	120.7(W)×37(H)×2.85(D)	Note 1
View Angle (视角)	FULL	
Base color Notes (基色)	Black	-
Weight (重量)	TBD	
Driver IC (驱动 IC)	ST7262/ST72568	
CTP IC (触摸 IC)	NA	

Note 1: Not include FPCs & Bezel extrude stucture.

备注 1: 不包括排线和面板构造

4. Interface signals（接口信号）

Table 2（表 2）

—	1	LED-K	21	B0
	2	LED-A	22	B1
	3	NC	23	B2
	4	VDD	24	B3
	5	R0	25	B4
	6	R1	26	B5
	7	R2	27	B6
	8	R3	28	B7
	9	R4	29	GND
	10	R5	30	CLK
	11	R6	31	DISP
	12	R7	32	HSYNC
	13	G0	33	VSYNC
	14	G1	34	DE
	15	G2	35	NC
	16	G3	36	GND
	17	G4	37	XR
	18	G5	38	YD
	19	G6	39	XL
	20	G7	40	YU

PEC No.	MODEL No.	Revised	PAGE
EQ2021121801	EQT500HYZ018L	Ver01	4

EASYQUICK TECHNOLOGY

Table 3 (表 3)

Pin No.	Symbol	I/O	Description	Remark

Table 4 (表 4)

Assembled on (组装)	Item (条目)	Description (描述)
Phone PWB (手机主板)	Connector Type (连接类型)	插接
	Pin Amount (数量)	40
	Manufacturer (制造商)	通用
	Part Number(零件号)	40 pin 0.5 间距下接卡扣

5. LED back light（背光灯）

At main panel the back light uses 16 pcs edge light type white LED.

在背光的主面板用 12 颗白色 LED 灯

Table 5（表 5）

Parameter（参数）	Symbol（样品）	Min.（最小值）	Typ.（标准值）	Max.（最大值）	Unit（单位）	Remark（备注）
LED Voltage（LED 电压）	VLED	8.4	9.6	9.9	V	[Note 5-2]
LED Current（LED 电流）	ILED	-	140	-	mA	
Power Consumption（电功率）	WLED	--	1344	-	mW	[Note 5-2]
Number of LED components（LED 组成部件数量）		20			PCS/（片）	
Connection Type(Serial/Parallel/Other) 连接类型(串联/并联/其他)		2*10 pcs LEDs				

Note:

- *12 pcs of LED
- *Please consider Allowable Forward Current on used temperature
- *12 颗灯
- * 请考虑允许范围内的正向电流的使用温度

■ Ambient Temperature vs. Allowable Forward Current

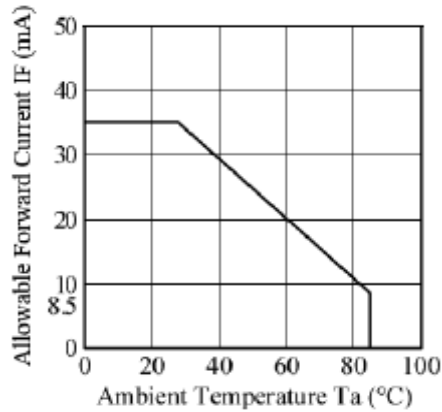


Fig.1（图 1）

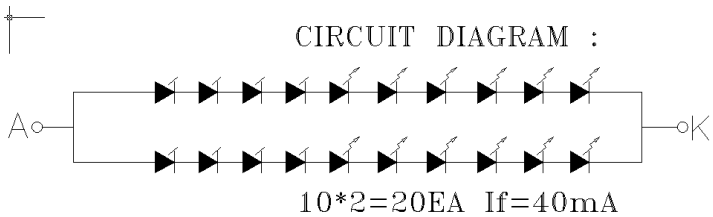


Fig.2*Schematics drawing of lighting（绘制照明图 图.2）

Note: Logic high and low levels are specified as 30% and 70% of IOVCC for Input signals.

Note: Ta = -30 to 70 °C, IOVCC=1.65V to 3.3V, VCI=2.5V to 3.3V, GND=0V

备注: 指定逻辑高和低电平作为输入信号IOVCC的70%和30%。

备注: Ta = -30 to 70 °C, IOVCC=1.65V to 3.3V, VCI=2.5V to 3.3V, GND=0V

PEC No.	MODEL No.	Revised	PAGE
EQ2021121801	EQT500HYZ018L	Ver01	6

EASYQUICK TECHNOLOGY

6. Optical Characteristics (光学特征)


Table 6 (表 6)

Item 项目		Symbol (样品)	Condition (条件)	Min. (最 小值)	Typ.(标 准值)	Max. (最 大值)	Unit (单 位)	Remark (备注)
Response time (响应时间)	Rise (上升) +Fall (下降)	Tr+Tf	$\theta=0^\circ$	-	30	40	ms	
Brightness (亮度)		Br	$\theta=0^\circ$	--	1000	-	Cd/m ²	
Contrast ratio (对比度)		CR	$\theta=0^\circ$	800	1000	-	-	
Viewing angle(with Polarizer) (视角)	Top (顶部)		CR $\geq$ 10	70	80		degree	
	Bottom (底部)			70	80			
	Left (左边)			70	80			
	Right (右边)			70	80			
White Chromaticity (白色色度)		X	CIE	0.26	--	0.30	-	-
		Y		0.26	--	0.31	-	-
NTSC (色彩饱和度)			-	60			%	-

PEC No.	MODEL No.	Revised	PAGE
EQ2021121801	EQT500HYZ018L	Ver01	7

7. LCD Module Outline dimensions (模组外形图)

Fig.3 (图 3)

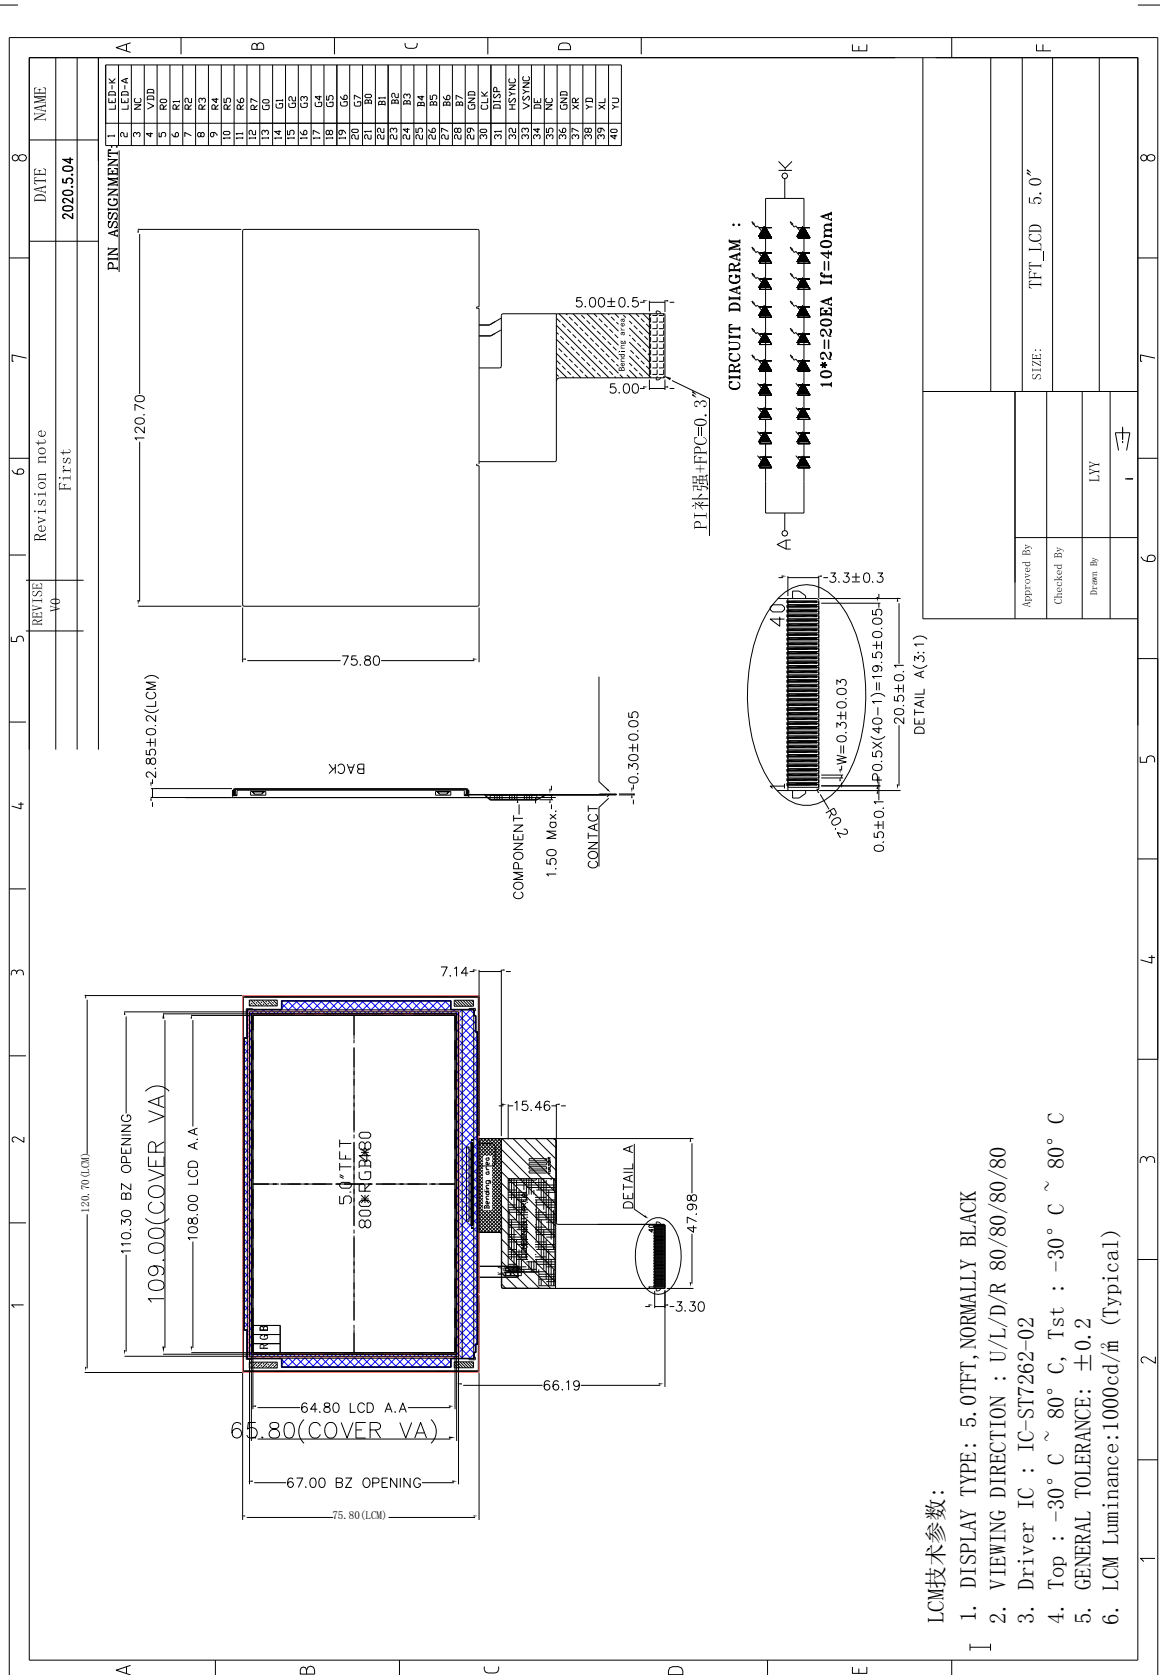

PEC No.	MODEL No.	Revised	PAGE
EQ2021121801	EQT500HYZ018L	Ver01	8

EASYQUICK TECHNOLOGY

8. RELIABILITY TEST CONDITIONS 可靠性试验条件

Top : -30°C ~ 80°C, Tst : -30°C ~ 80°C

9. Packaging Specification (包装规格)

1.1 Package quantity in one Box : 160PCS

1.2 Box Size : 380cm*330cm*210cm

1.3 1 BOX = 2 CARTON

1.4 1 CARTON = 10(Full tray) + 1 (dummy / top tray) =11 tray

1.5 1 TRAY = 8 PCS LCM

