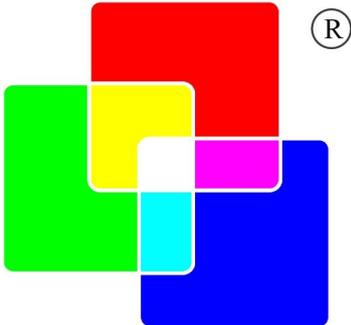


PREPARED BY : (制作人 :) YQL	 <p>EASYQUICK TECHNOLOGY</p> <p>SPECIFICATION 深圳市易快来科技股份有限公司</p>	SPEC No: (规格型号:) EQT550HKJ520G
R&D APPROVED BY: (研发核准:) GJM		FILE No : (档案编号 :) EQ2025122601
QC APPROVED BY: (品质核准:) WPC		ISSUE (日期) 2025-12-26 PAGE (页码) 16
APPLICABLE DIVISION (适用范围) <input checked="" type="checkbox"/> Mobile LCD DIVISION <input checked="" type="checkbox"/> 手机液晶模组		

For **720*1440** TFT LCD Module& CTP Model No

EQT550HKJ520G SPEC

Customer side signature (客户方签名)				
	签名 部门	Acknowled-g e (承认人)	Date (日期)	Remarks (备注)
	Structure (结构)			
	Electronics (电子)			
	Item (项目)			
	Quality (品质)			

EASYQUICK TECHNOLOGY

(易快来科技)

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	1

EASYQUICK TECHNOLOGY

Contents (目录)

Contents (目录)	1
1. Revision Record (修订记录)	2
2. Application (应用)	3
3. Construction and Outline (结构与大纲)	3
4. Mechanical Specification (参数规格)	4
5. Interface signals (接口信号)	5
6. LED back light (背光灯)	6
7. LCD Electrical Specifications (LCD 电气规格)	7
8. Optical Characteristics (光学特征)	10
9. Inspection standards (检验标准)	11
10. Reliability Test Standards (可靠性试验标准)	15
11. LCD Module Outline dimensions (模组外形图)	16
12. Packaging Specification (包装规格)	17

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	3

EASYQUICK TECHNOLOGY

2. Application (应用)

This data sheet is to introduce the specification of **EQT550HKJ520G** active matrix **16.7M** color TFT LCD module.

Main color LCD module is controlled by Driver IC **JD9365TX**.

If any problem occurs concerning the items not stated in this specification, it must be solved sincerely by both parties after deliberation.

As to basic specification of driver IC refer to the IC specification and handbook.

本规格书是为了介绍 **EQT550HKJ520G** 有源矩阵 **16.7M** 彩色 TFT LCD 模块的规格。

主彩色液晶显示模块由驱动芯片 **JD9365TX** 控制

本规范未尽事宜如有问题，双方必须认真协商解决。

驱动 IC 的基本规格参照《IC 规格书》和相关《手册》。

3. Construction and Outline (结构与大纲)

Construction: LCD panel, Driver (COG), FPC with electric components, **14 CHIP-WHITE** LED lump, prism sheet, diffuser, light guide and reflector, plastic frame to fix them mechanically.

There shall be no scratches, stains, chips, distortions and other external drawbacks that may affect the display function.

In order to realize thin module structure, double-sided adhesive tapes are used to fix LCD panels.

As these tapes do not guarantee to permanently fix the panels, LCD panel may rise from the module when shipped from factory.

So please make sure to design the system to hold the edges of LCD panel by the soft material such as sponge when LCD module is assembled into the cabinet.

结构:液晶面板，驱动或 COG，带电子元件的 FPC, **14** 个白光 LED 块，棱镜片，扩散器，导光器和反射器，塑料框架机械固定。

不应有可能影响显示功能的划痕、污迹、芯片、畸变等外部缺陷。

为了实现薄型模块结构，采用双面胶带固定液晶面板。由于这些胶带不能保证永久有效固定面板，LCD 面板在出厂时可能会从模块内移动。

所以在液晶模块组包装和进柜时，请务必将包装设计成用海绵等软材料支撑液晶面板的边缘。

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	4

EASYQUICK TECHNOLOGY

4. Mechanical Specification (参数规格)

Table 1 (表 1)

Item(项目)	Specifications(规格)	Unit (单位)
Screen size (屏幕尺寸)	5.45	inch
Display mode (显示模式)	Normal Black	-
Active area (显示范围)	61.88(H)×123.77(V)	mm
Display format (分辨率)	720×RGB×1440	-
Pixel configuration (像素)	0.08595(H) X0.08595(V)	mm
Pixel arrangement (像素排列)	R. G. B. strip	-
Outline Dimensions (外形尺寸)	69.06(W)×148.9(H)×2.91(D)	Note 1
View Angle (视角)	FULL	
Base color Notes (基色)	16.7M	-
Weight (重量)	TBD	
Driver (驱动 IC)	JD9365TX	

Note 1: Not include FPCs & Bezel extrude structure.

备注 1: 不包括排线和面板构造

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	5

EASYQUICK TECHNOLOGY

5. Interface signals (接口信号)

Table 2 (表 2)
Table 2 LCM PIN

Pin No.	LCD 接口 pin 定义	LCD 接口说明
1	GND	地
2	MIPI_D0N	LCD_MIPI 信号线 0-
3	MIPI_D0P	LCD_MIPI 信号线 0+
4	GND	地
5	MIPI_D1N	LCD_MIPI 信号线 1-
6	MIPI_D1P	LCD_MIPI 信号线 1+
7	GND	地
8	MIPI_CLKN	LCD_MIPI 时钟线 -
9	MIPI_CLKP	LCD_MIPI 时钟线 +
10	GND	地
11	MIPI_D2N	LCD_MIPI 信号线 2-
12	MIPI_D2P	LCD_MIPI 信号线 2+
13	GND	地
14	MIPI_D3N	LCD_MIPI 信号线 3-
15	MIPI_D3P	LCD_MIPI 信号线 3+
16	VLD028I_CTP	NC
17	TP_INT	TP 中断线
18	TP_SDA	TP 数据线
19	TP_SCL	TP 时钟线
20	TP_RST	TP 复位线
21	TE	Serves TE (Tearing Effect) pin of each scan line
22	RST	LCM 复位
23	VIO18	电源 1.8V
24	LCDI_ID=1.45V	ID
25	VDD(2.8V)	NC
26	LEDK2	背光负极
27	LEDK1	背光负极
28	AVEE	负源驱动电源 -5.5V
29	AVDD	正源驱动电源 +5.5V
30	LEDA	背光正极

Notes: 2.FPC Connector 30pin

备注: 2.30pin 排线连接器定义

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	6

EASYQUICK TECHNOLOGY

6. LED back light (背光灯)

At main panel the back light uses 14 pcs edge light type white LED.

在背光的主面板用 14 颗白色 LED 灯

Table 4 (表 4)

Parameter (参数)	Symbol (样品)	Min. (最小值)	Typ. (标准值)	Max. (最大值)	Unit (单位)	Remark (备注)
LED Voltage (LED 电压)	VLED	18.9	21	23.1	V	[Note 5-2]
LED Current (LED 电流)	ILED	-	40	-	Ma	
Power Consumption (电功率)	WLED	756	840	924	Mw	[Note 5-2]
Number of LED components (LED 组成部件数量)		14			PCS (片)	
Connection Type (Serial/Parallel/Other) (连接类型(串联/并联/其他))		7Sx2P LEDs				

Note:

*14 pcs of LED

*Please consider Allowable Forward Current on used temperature

*14 颗灯

* 请考虑允许范围内的正向电流的使用温度

■ Ambient Temperature vs. Allowable Forward Current

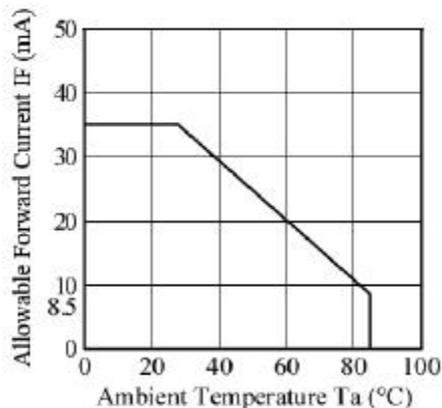


Fig.1 (图 1)

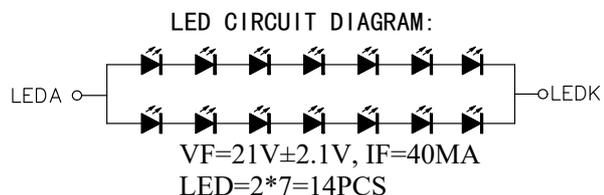


Fig.2*Schematics drawing of lighting (绘制照明图 图.2)

Note: Logic high and low levels are specified as 30% and 70% of IOVCC for Input signals.

Note: Ta = -30 to 70 °C, IOVCC=1.65V to 3.3V, VCI=2.5V to 3.3V, GND=0V

备注: 指定逻辑高和低电平作为输入信号IOVCC的70%和30%。

备注: Ta = -30 to 70 °C, IOVCC=1.65V to 3.3V, VCI=2.5V to 3.3V, GND=0V

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	7

EASYQUICK TECHNOLOGY

7. LCD Electrical Specifications (LCD 电气规格)

Table 5 (表 5)

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Power supply input voltage (电源输入电压)	VDD	-	-	-	V	
I/O logic voltage (I/O 逻辑电压)	VDDIO	1.65	1.8	1.95	V	
Input voltage 'H' level (输入电压高水平)	VIH	4.5	5.8	6.3	V	
Input voltage 'L' level (输入电压低水平)	VIL	-4.5	5.8	-6.3	V	
Power supply current (电源电流)	IVDD	-	TBD	-	mA	
TFT gate on voltage (TFT门打开电压)	VGH		/		V	
TFT gate off voltage (TFT门关闭电压)	VGL		/		V	
Analog power supply voltage (模拟电源电压)	AVDD	-	-	-	V	
Differential input common mode voltage (差动输入共模电压)	VCOM	-	-	-	V	Note1

Note1 : The value is just the reference value. The customer can optimize the setting value by the different D-IC

Vcom must be adjusted to optimize display quality, as Crosstalk and Contrast Ratio etc..

备注：该值只是参考值，应用于不同的驱动芯片需要优化设定值，VCOM 必须进行调整来优化显示质量，比如串扰、对比度等

7.AC CHARACTERISTICS (交流特性)


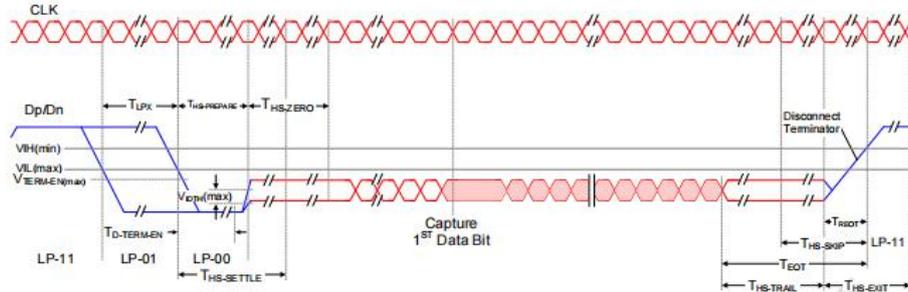


Figure 11.8: High-Speed Data Transmission in Bursts


Parameter	Description	Min	Typ	Max	UNIT
T_{LPX}	Transmitted length of any Low-Power state period	50	-	-	ns
$T_{HS-PREPARE}$	Time that the transmitter drives the Data Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission	$40 + 4*UI$	-	$85 + 6*UI$	ns
$T_{HS-PREPARE} + T_{HS-ZERO}$	$T_{HS-PREPARE}$ + time that the transmitter drives the HS-0 state prior to transmitting the Sync sequence.	$145 + 10*UI$	-	-	ns
$T_{D-TERM-EN}$	Time for the Data Lane receiver to enable the HS line termination.	-	-	$35 + 4*UI$	ns
$T_{HS-SETTLE}$	Time interval during which the HS receiver shall ignore any Data Lane HS transitions.	$85 + 6*UI$	-	$145 + 10*UI$	ns
$T_{HS-TRAIL}$	Time that the transmitter drives the flipped differential state after last payload data bit of a HS transmission burst	$\max(n*8*UI, 60 + n*4*UI)$	-	-	ns
$T_{HS-EXIT}$	Time that the transmitter drives LP-11 following a HS burst.	100	-	-	ns

8. POWER SEQUENCE (电源时序)

DCDC power mode: (External AVDD/AVEE Power)
 IOVCC=VCCH=1.65V ~ 1.95V, AVDD=4.5V ~ 6.3V, AVEE=-4.5V ~ -6.3V
 Power on:

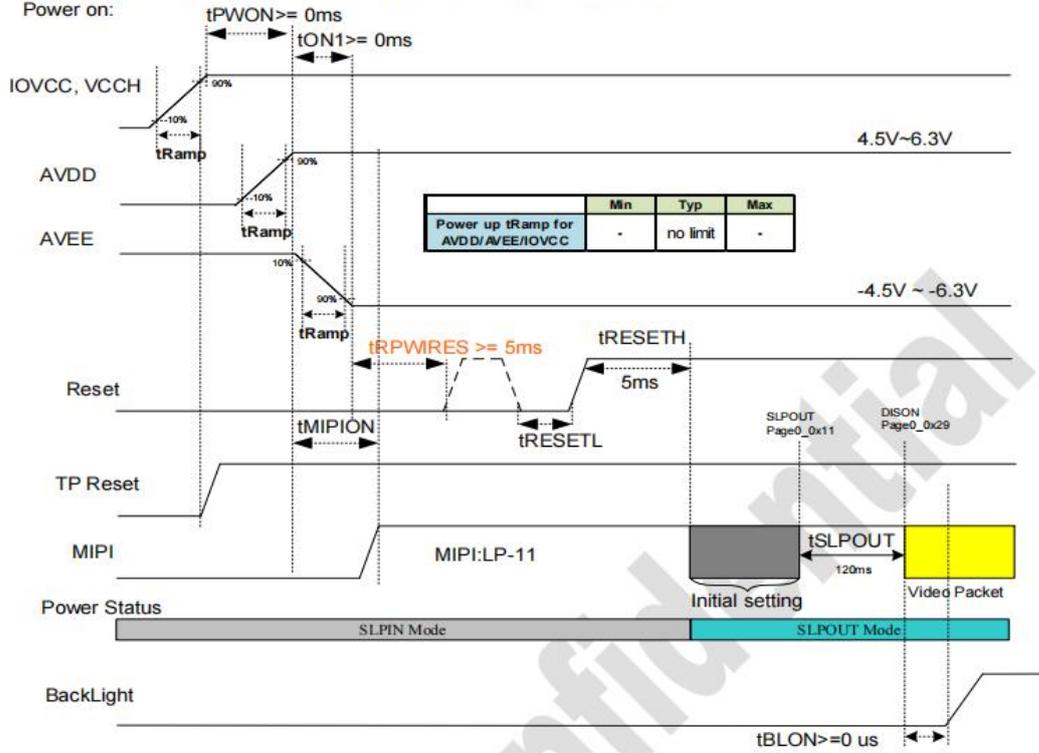

DCDC power mode: External AVDD/AVEE Power
 IOVCC=VCCH=1.65V ~ 1.95V, AVDD=4.5V ~ 6.3V, AVEE=-4.5V ~ -6.3V
 Power off: Case 1

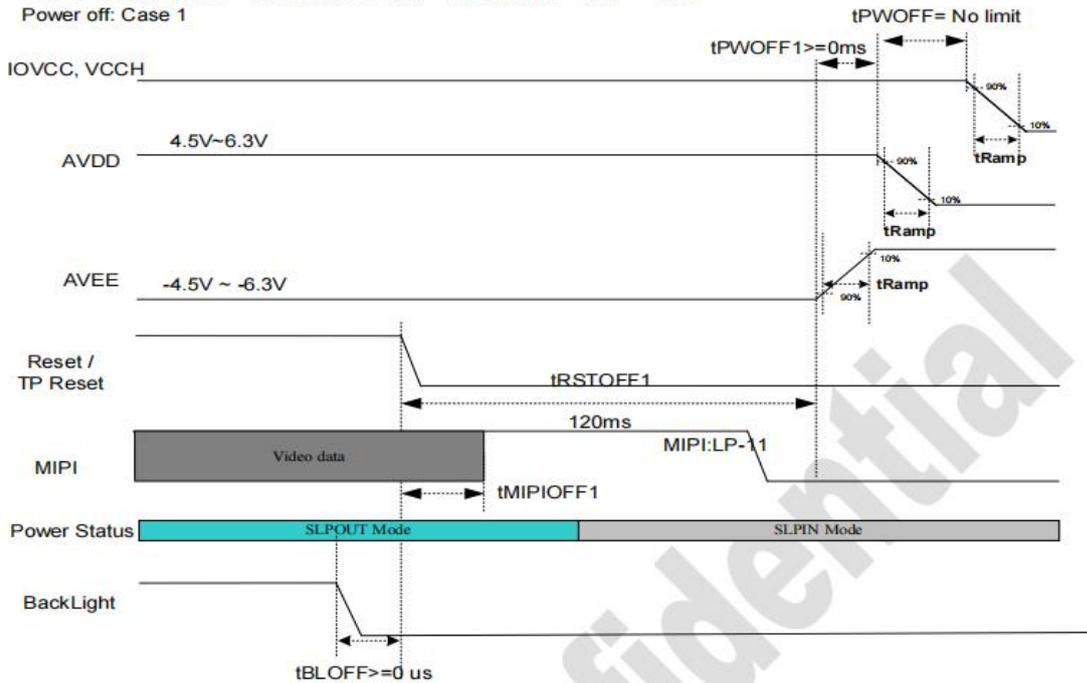

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	10

EASYQUICK TECHNOLOGY

9.Optical Characteristics (光学特征)

Table 6 (表 6)

Item 项目		Symbol (样品)	Condition (条件)	Min. (最小值)	Typ.(标准值)	Max. (最大值)	Unit (单位)	Remark (备注)
Response time (响应时间)	Rise (上升) +Fall (下降)	Tr+Tf	$\theta=0^\circ$	-	35	40	ms	
Brightness (亮度)		Br	$\theta=0^\circ$	350	400	-	Cd/m ²	
Contrast ratio (对比度)		CR	$\theta=0^\circ$	1000	1500	-	-	
Viewing angle(with Polarizer) (视角)	Top (顶部)		-	80	85	-	degree	
	Bottom (底部)		-	80	85	-		
	Left (左边)		-	80	85	-		
	Right (右边)		-	80	85	-		
White Chromaticity (白色色度)		X	$\theta=0^\circ$	0.265	0.295	0.325	-	
		Y		0.285	0.315	0.345	-	
NTSC (色彩饱和度)			-	65	-	-	%	

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	11

EASYQUICK TECHNOLOGY

10. Inspection standards (检验标准)

8.1 检查环境:

温度: $23 \pm 3^\circ\text{C}$ 、湿度: $50 \pm 20\%$

照度: 外观检验 光照强度为 $1000 \pm 200\text{LUX}$, 功能点亮在 $150 \sim 200\text{lux}$ (客户特殊要求的依照确认后客户要求为准)

8.2 检查条件:

8.2.1 检测距离: 25-35cm;

8.2.2 检视角度:

电测: 检视面与桌面成 45° 度, 上下左右转动 45° 度;

外观: 上下左右转动 75° 度

8.2.3 检验时间: 检查总时间不超过 15 秒;

8.2.4 检验人员: 裸视或矫正视力不低于 1.0 且无色盲; 并熟悉本标准;

8.3 抽样计划及允收水准:

8.3.1 抽样方案: 采用标准 GB/T 2828.1-2003, 抽检水平: 一般检验水平 II。

8.3.2 严重缺点(CR): $AC=0, RE=1,$

8.3.3 主要缺陷(MA): $AQL=0.4;$

8.3.4 次要缺陷(MI): $AQL=1.0$

8.4 检验工具及注意事项:

8.4.1 检验工具: CA310, 目镜, 菲林卡, 游标卡尺, ND 卡等;

8.4.2 检验者需戴防静电手指套和有线静电环;

8.4.3 检验将使用一个荧光灯作为照明, 与产品平面构成上下左右多角度目检, 检查表面外观时可利用反光形成的亮&暗部进行检查;


8.4.4 检查员目视或以比对卡、放大镜进行比对检查;

8.4.5 为预防静电, 保护膜撕起的时间最少为 2 秒;

8.4.6 本标准中未定义到的不良项目, 需向上报告, 经确认 OK 后方可后流;

8.4.7 反光检查图示和 ND 卡使用图示

燈源	亮部	暗部
螢光反射		
定義	反射面可看到燈源處	反射面不可看到燈源處 (範圍是指可見燈源處附近, 如圖所示)

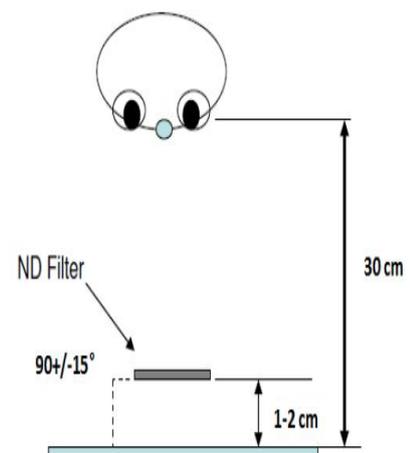


PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	12

EASYQUICK TECHNOLOGY

8.5 产品表面等级分类

分类	说明	备注
AA 区	正面 TP/LCM 显示区域	如图
A 区	除 AA 区外的其他正面区域	如图
B 区	四周的侧边区域	如图

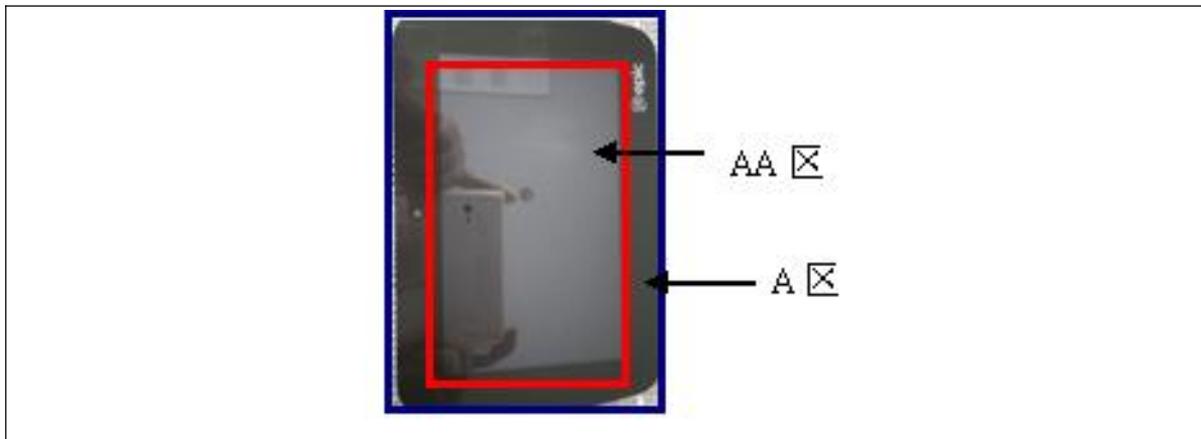

8.6 针对单色画面，色彩要正常且均匀 16 色阶画面，所有彩阶为正常颜色，界面清晰无模糊、跨界或其他不良；

8.6.1 规格与结构尺寸，尺寸单位 mm，结构与尺寸符合工程图纸要求及 BOM 表规格。

8.6.2 产品烧录及电性测试：产品烧录软件版本及数据设定等符合规格书或 BOM 表，LCM 电性测试符合产品规格书/以上产品检验标准。

8.7 外观、电测检验标准（单位为 mm）

参照产品 TP/LCD 新外观标准（一体化来料的 TP/LCD 标准）进行检验参照 B 级：

备注：缺陷不良有面积和直径两种标准，使用时请注意区分。非显示面不影响组装类不良并不影响功能不判定为不良。

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	13

EASYQUICK TECHNOLOGY

状态	不良项目	规格描述	允收标准
点亮状态	异物点	$D \leq 0.1$, 忽略不计; 不可密集 $0.1\text{mm} < D \leq 0.2\text{mm}$, $N \leq 1$	MI
	像素亮点/暗点 (红绿蓝画面下可见点)	$D \leq 0.20\text{mm}$, $N \leq 1$	MI
	密集点	$D \leq 0.1$, 在 $10 \times 10\text{mm}$ 范围内, $N \leq 5$, 必要时以签限样为准	MI
	线状不良 (包括软划伤、毛丝)	$W \leq 0.05\text{mm}$ and $L \leq 2.5\text{mm}$, $N \leq 2$ $DS \geq 15\text{mm}$	MI
	LCD/COG Mura	ND6%卡在灰阶画面遮住不可见判为OK, 必要时以签限样为准	MI
不点亮状态	异物点	$D \leq 0.1\text{mm}$, 忽略不计, 不可密集 $0.1\text{mm} < D \leq 0.25\text{mm}$, $N \leq 2$ $DS \geq 15\text{mm}$	MI
	线状不良 (包括软划伤、毛丝)	$W \leq 0.05\text{mm}$ and $L \leq 2.5\text{mm}$, $N \leq 2$ $DS \geq 15\text{mm}$	MI
	划伤	硬划伤不允许	MI
TP/CG 类缺陷	表面脏污	1.不可擦拭脏污不允许 2.可擦拭脏污, 脏污小于产品总面积的 10%, 每片产品小于两点, 擦拭时间小于 5 秒, 允许。	MI
	油墨锯齿/溢墨	$W \leq 0.1\text{mm}$, 允许 $0.1\text{mm} < W \leq 0.25\text{mm}, L \leq 1\text{mm}$, 仅允许 1 个 $W > 0.25\text{mm}$ or $L > 1\text{mm}$, 不允许	MI
	崩边/崩角	1.产品正面:崩角、崩边 $D \leq 0.2$ 2.产品背面: 最大允许缺陷尺寸: $X \leq 0.5, Y \leq 0.5, Z \leq 1/2T$;且每条边上只允许有 2 个缺陷, 两缺陷间距离 $\geq 15\text{mm}$	MI
	IR 孔	1.重影、黑白点 $\leq 0.2\text{mm}$, $N \leq 2$ 个, 黑色背景下不可见 2.IR 孔痕迹 (不对光检验): $W < 0.03\text{mm}$, 忽略不计 (密集不允许), $0.03\text{mm} < W \leq 0.05\text{mm}$, $L < 3\text{mm}$, $N \leq 1$, $W > 0.05\text{mm}$, 不允许 3.IR 油印刷残缺、透光、划伤透光, 不允许	MI

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	14

EASYQUICK TECHNOLOGY

	摄像孔	1.边缘毛刺 $\leq 0.15\text{mm}$, $N \leq 1$ 个; 边缘锯齿 $\leq 0.1\text{mm}$ 2.异物点: 摄像孔中心处: 不允许任何不良; 1/3 区域以外: $D \leq 0.2\text{mm}, N \leq 1$	MI
	LED 孔油墨不均	1.点状 $D \leq 0.2\text{mm}, N \leq 1$ 2.不规则形状, 以限度样判定为准	MI
	油墨掉漆、透光	允许补漆, 补漆后油墨不脱落、正面不可见, 无色差则判定 OK	MI
其他项目	显示缺划(全显状态下, 出现部分不显示)	不允许	MA
	短路(部分多显或不显示)	不允许	MA
	无显示	不允许	MA
	残影	依照产品规格书	MI
	视角错	不允许	MA
	显示浓/淡	按照规格书电压偏差要求控制或限度样板	MI
	在全显或部分显示画面, 出现斜纹	不允许, 特殊情况下见限度样板	MI
	画面闪烁	不允许	MA
	显示模糊	不允许	MA
	显示画面不跳图/跳图异常	不允许	MA
	字符变形	不允许超出字符宽度的 1/3, 尺寸小于 0.2mm	MI
	触摸无功能	不允许	MA
	边框压线	检验视角不可见边框线 NG	MI
	亮度和均匀度	依照图纸规格	MI
	条纹	不允许	MI
	CROSSTALK/FLIKER	依照规格书	MI
漏光	参照限度样	MI	

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	15

EASYQUICK TECHNOLOGY

11. Reliability Test Standards (可靠性试验标准)


序号	实验项目	实验条件、方法	判定标准	实验数量	试验时机/频率		备注												
					样品	批量													
1	高温存储	70°C, 168H	通过基本性能测试; 外观和结构正常	2pcs	●	●	每月一次												
2	低温存储	-20°C, 168H	显示屏外观、显示功能正常, 不允许出现新的缺陷。	2pcs	●	●	每月一次												
3	高温高湿	40°C ±2、90%RH (+2%/-3%), 96H; 实验后回温、回湿 2 小时后检查	通过基本性能测试; 外观和结构正常	2pcs	●	●	每月一次												
4	温度冲击	样品不通电, -30°C (45min) ~ 80°C (45min) 为 1cycle, 共 24cycles, 试验后回温 2 小时后检查	通过基本性能测试; 外观和结构正常	8pcs	●	●	每月一次												
5	盐雾测试	溶液含量为 5% 的氯化钠溶液。将样品关机放在盐雾试验箱内(箱内温湿度分别为 +35±2°C, 90% (+2%/-3%) RH), 样品. 竖直放置 24h、正面放置 10h、反面面放置 10h, 以免溶液喷洒不均或有的表面喷不到。实验期满。取出样品, 清水擦拭后烘干, 进行试验后检查。	通过基本性能测试; 外观和结构正常	3pcs	●	●	每月一次												
6	ESD	不上电阻容: 100PF+1500ohm 上电阻容: 150PF+330ohm 空气放电: ±6KV, 9 点, 正负各 10 次 接触放电: ±4KV, 9 点, 正负各 10 次	通过基本性能测试; 外观和结构正常	2pcs	●	●	每月一次												
7	FPC 金手指插拔测试	用镊子夹住 FPC 金手指正面朝上, 导电面朝下, 垂直方向 插入 FPC 连接器, 再卡扣定位, 再将卡扣松脱以垂直方向 拔出。每 5 次在放大镜下检查 FPC 有无磨损, 再通电进行 功能检查。插拔力范围 1~2.5kgf, 共计 20 次	FPC 外观无断裂且显示正常	2PCS	●	●	每月一次												
8	UV 光照测试	在 55°C ±5°C 条件下, 以 340nm 波长的光, 0.36W/m2 照射 强度, 照射产品被测面 48 小时后, 样品在正常大气条件下 (20°C ±5°C) 恢复 1 小时, 进行外观验证。	通过基本性能测试; 外观和结构正常	2PCS	●	●	每月一次												
9	包装跌落	按一角三边六 面各跌一次, 跌落高度按每箱重量参考下表 <table border="1" data-bbox="359 1832 833 2031"> <thead> <tr> <th>Weight</th> <th>Drop Height</th> </tr> </thead> <tbody> <tr> <td>0 ≤ W < 10kg</td> <td>76.2cm</td> </tr> <tr> <td>10 ≤ W < 19kg</td> <td>61.0cm</td> </tr> <tr> <td>19 ≤ W < 28kg</td> <td>45.7cm</td> </tr> <tr> <td>28 ≤ W < 45kg</td> <td>30.5cm</td> </tr> <tr> <td>45 ≤ W < 68kg</td> <td>20.3cm</td> </tr> </tbody> </table>	Weight	Drop Height	0 ≤ W < 10kg	76.2cm	10 ≤ W < 19kg	61.0cm	19 ≤ W < 28kg	45.7cm	28 ≤ W < 45kg	30.5cm	45 ≤ W < 68kg	20.3cm	无破损	1 箱	●	●	每月一次
Weight	Drop Height																		
0 ≤ W < 10kg	76.2cm																		
10 ≤ W < 19kg	61.0cm																		
19 ≤ W < 28kg	45.7cm																		
28 ≤ W < 45kg	30.5cm																		
45 ≤ W < 68kg	20.3cm																		

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	16

EASYQUICK TECHNOLOGY

12.LCD Module Outline dimensions (模组外形图)

Fig.3 (图3)

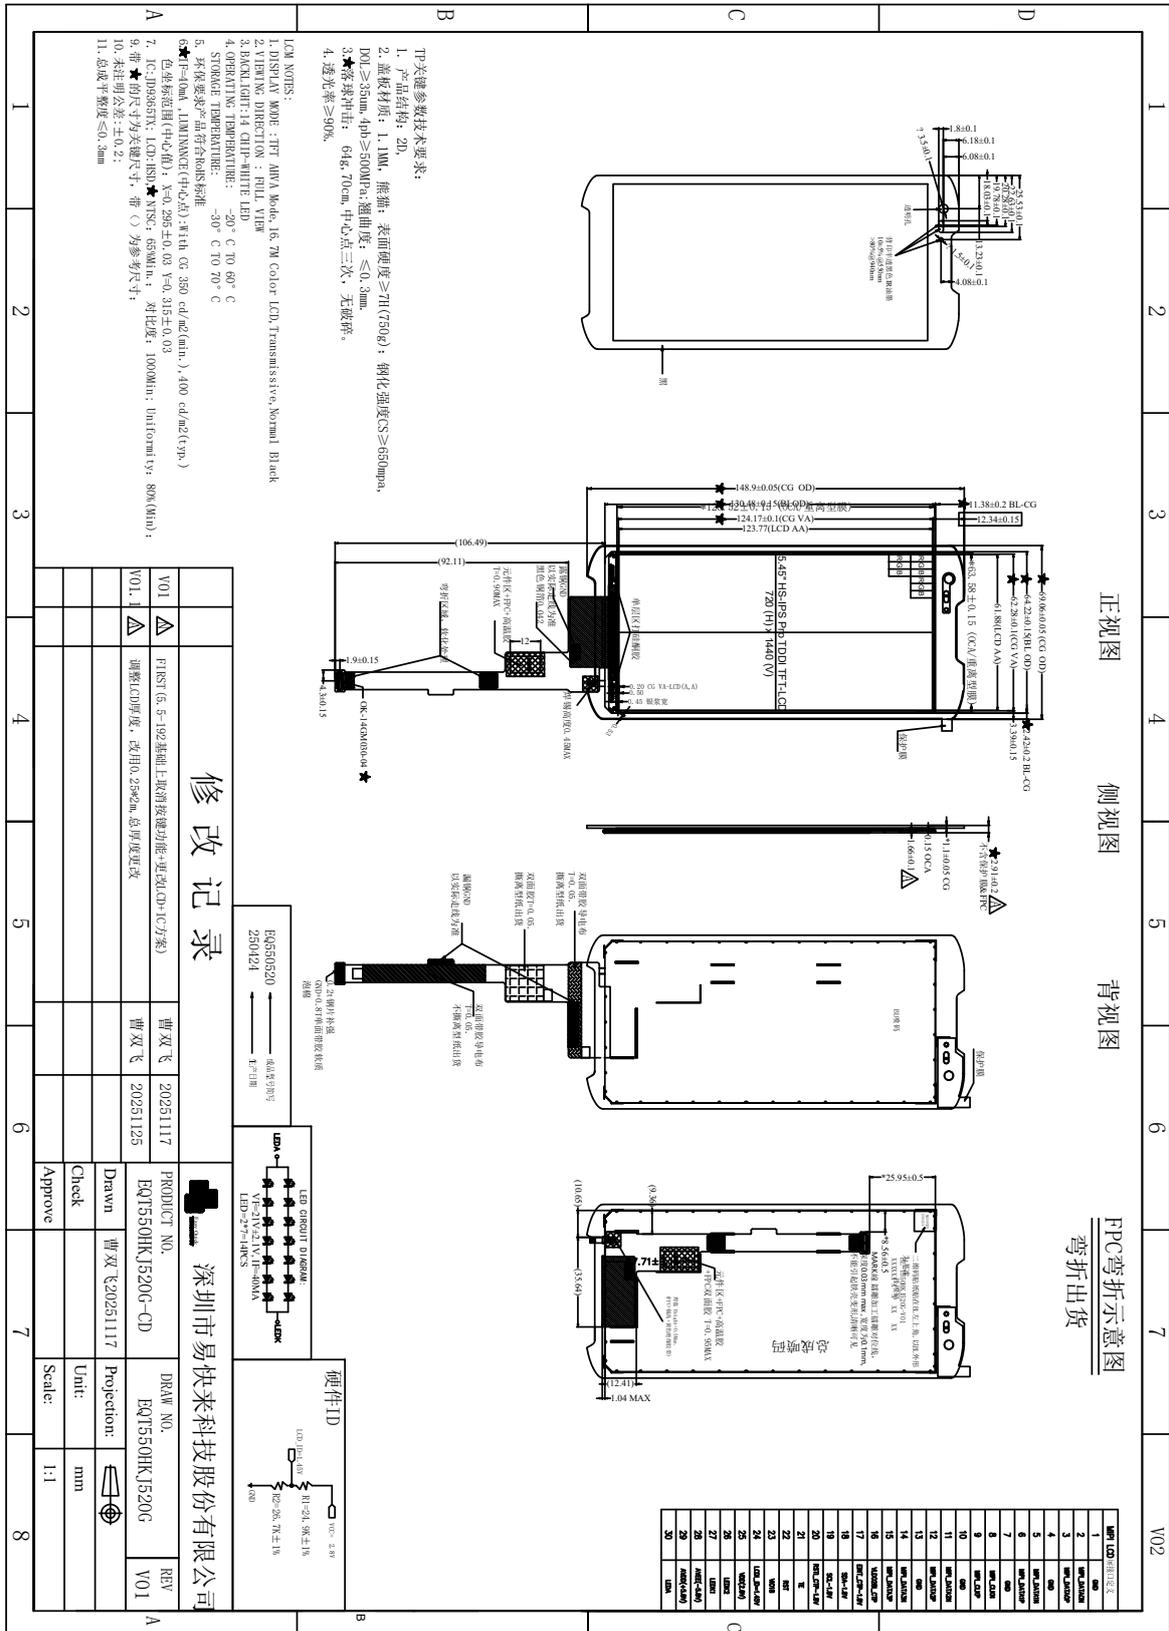

PEC No.	MODEL No.	Revised	PAGE
EQ2025122601	EQT550HKJ520G	Ver01	17

EASYQUICK TECHNOLOGY

13.Packaging Specification (包装规格)

11.1 Package quantity in one Box :TBDPCS

11.1.2 Box Size : TBDcm*TBDcm*TBDcm

11.1.3 1 BOX = TBD CARTON

11.1.4 1 CARTON = TBD(Full tray) + TBD (dummy / top tray) =TBD tray

11.1.5 1 TRAY = TBD PCS LCM